
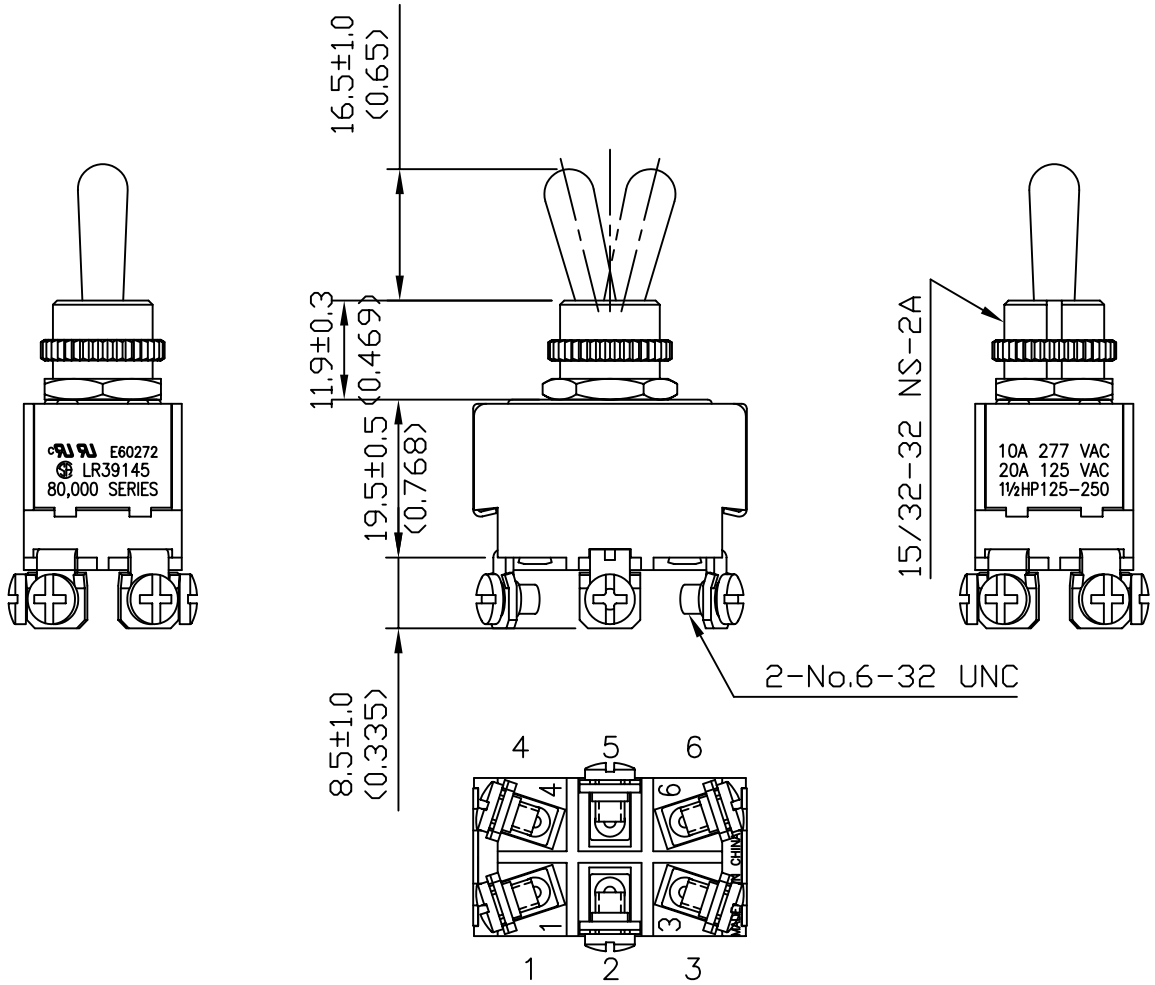


| | | | |
|----------------------------|---|--|--|
| Rating | 10A 277VAC, 20A 125VAC 1½HP 125-250VAC | | |
| Contact R | 50m ohm Max. | | |
| Insulation R | DC 500V 100M ohm Min. | | |
| Dielectric Strength | AC 1500V 1 minute | | |
| Circuit | 6P DPDT ON-ON | | |
| Operation Force | 1200g±300g | | |

KNURL NUT ASSY
HEX NUT ASSY

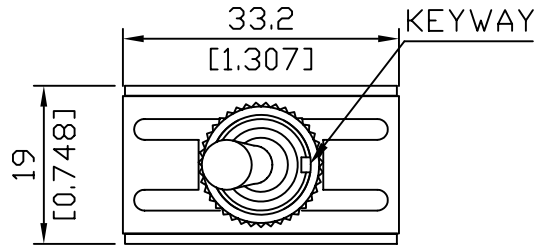

| | | | | |
|-------------|--------------|---------------------------|---------------|--|
| Unit | mm (inch) | DEL CITY P/N 73246 | REV. 1 | |
|-------------|--------------|---------------------------|---------------|--|