



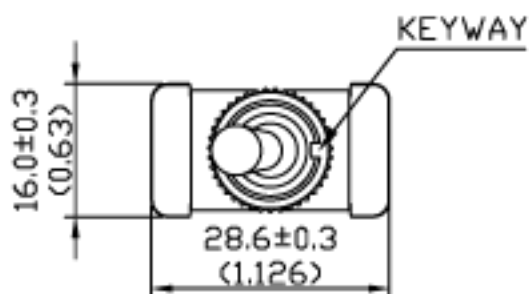

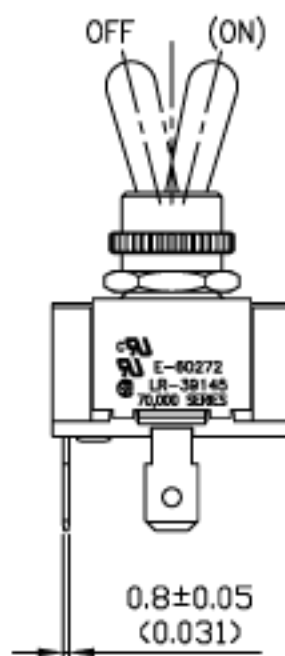


Rating	20A 125V, 10A 277V AC 3/4HP 125-250 VAC	Mount Hole		Circuit Structure	
Contact R	50m ohm Max.				
Insulation R	DC 500V 100M ohm Min.				
Dielectric Strength	AC 1500V 1 minute				
Circuit	2P SPST (ON)-OFF				
Operation Force	700g±200g				

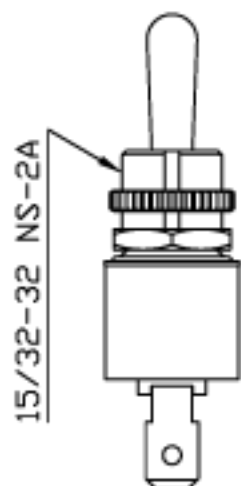

- 1 HEX NUT ASSY
- 1 KNURL NUT ASSY

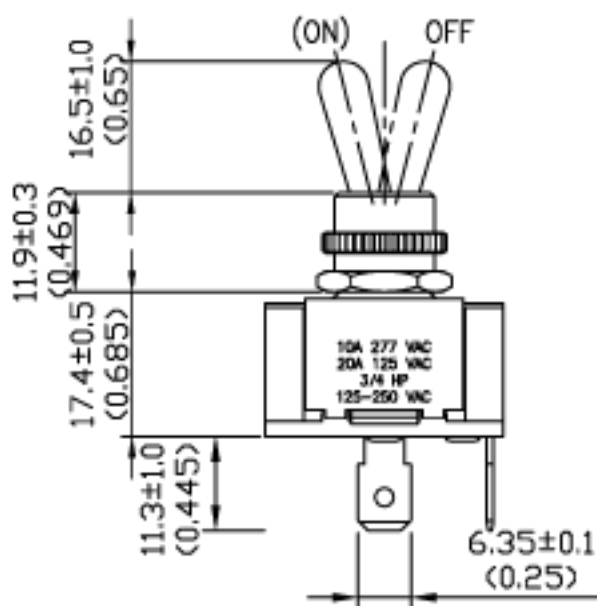

Unit	mm (inch)	SPEMCO	1196-Q/20	REV.	1
------	--------------	--------	-----------	------	---