


Rating	20A 125V,10A 277V AC 3/4HP 125-250 VAC	Mount Hole	Circuit Structure
Contact R	50m ohm Max.		
Insulation R	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Circuit	3P SPDT(ON)-ON		
Operation Force	600g \pm 200g		



- 1 HEX NUT ASSY
- 1 KNURL NUT IN BULK

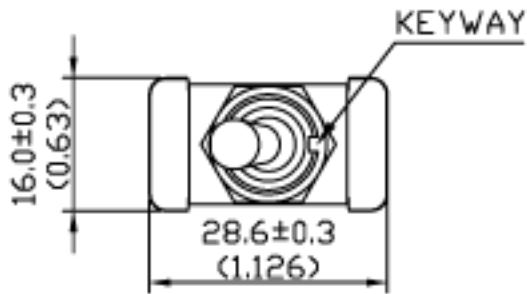