
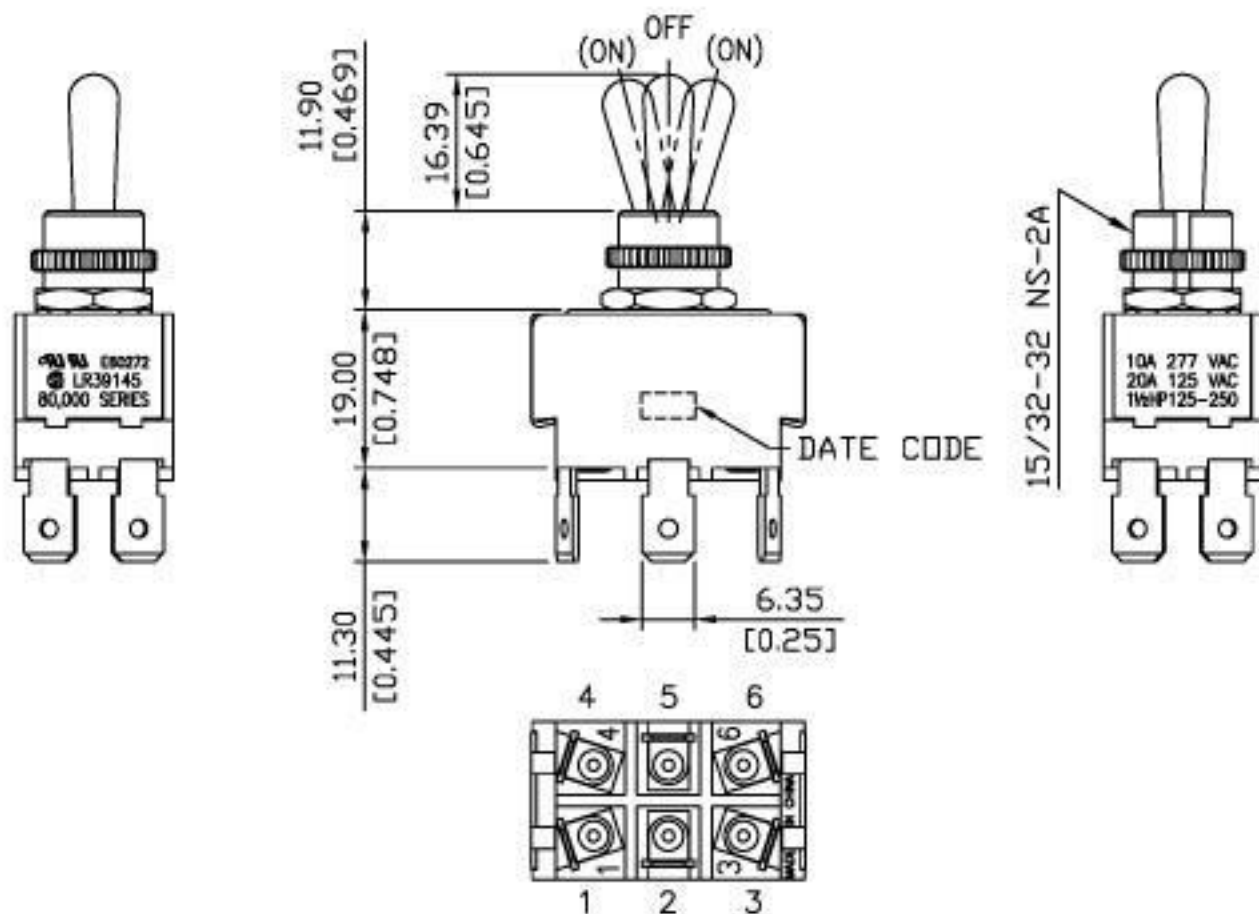


Rating	10A 277VAC, 20A 125VAC 1½HP125-250VAC	Mount Hole	Circuit Structure
Contact R	50m ohm Max.		
Insulation R	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Circuit	6P DPDT (ON)-OFF-(ON)		
Operation Force	1400g±400g		

KNURL NUT ASST
HEX NUT ASST

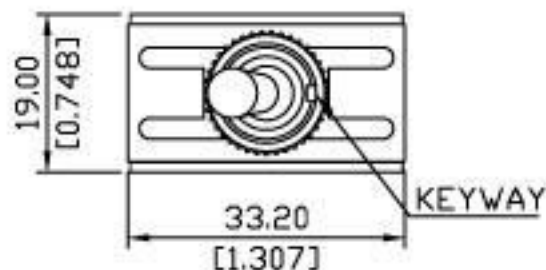

Unit

mm
(inch)

SPEMCO

1193-Q/20

REV.

1